

11-06-00

A

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37
CFR 1.53(b))

Attorney Docket No. Z0083/7006

First Named Inventor or Application Identifier

James F. Bredt et al.

Express Mail Label No.

EL711266272US

Date of Deposit

November 3, 2000

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)
2. ☒ Specification [Total pages 47]
31 - pages description
1 - pages abstract
15 - pages claims 119 - Total claims
3. ☒ Drawing(s) (35 USC 113) [Total sheets 3]
☒ Informal ☐ Formal [Total drawings 5]
4. ☐ Oath or Declaration [Total pages]
a. ☐ Newly executed (original or copy)
b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference
(usable if Box 4b is checked)
The entire disclosure of the prior application,
from which a copy of the oath or declaration is
supplied under Box 4b, is considered as being
part of the disclosure of the accompanying
application and is hereby incorporated by
reference therein.

ADDRESS Box Patent Application
TO: Commissioner for Patents
Washington, DC 20231

6. ☐ Microfiche Computer Program (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence
Submission (if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS


8. ☐ Assignment Papers/cover sheet &
documents(s)
9. ☐ 37 CFR 3.73(b) Statement
(when there is an assignee)
☐ Power of Attorney
10. ☐ English Translation of Document (if applicable)
11. ☐ Information Disclosure Statement PTO-1449
☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement(s)
☐ Statement filed in prior application, Status
still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

16. Other:

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

- ☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.:
- ☐ Cancel in this application original claims of the prior application before calculating the filing fee.
- ☐ Amend the specification by inserting before the first line the sentence:
- This application is a ☐ continuation ☐ divisional of application serial no. , filed , entitled , and now .

18. CORRESPONDENCE ADDRESS					
Correspondence address below					
ATTORNEY'S NAME	Gary S. Engelson, Reg. No. 35,128				
NAME	Wolf, Greenfield & Sacks, P.C.				
ADDRESS	600 Atlantic Avenue				
CITY	Boston	STATE	MA	ZIP	02210
COUNTRY	USA	TELEPHONE	(617) 720-3500	FAX	(617) 720-2441

19. SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED	
NAME	Gary S. Engelson, Reg. No. 35,128
SIGNATURE	
DATE	11-3-00

**MATERIAL SYSTEMS AND METHODS OF THREE-DIMENSIONAL
PRINTING**

Related Application

5 This non-provisional application claims the benefit under Title 35, U.S.C.
§119(e) of co-pending U.S. provisional application serial no. 60/164,000, filed
November 5, 1999, entitled "MATERIAL SYSTEMS AND METHODS OF THREE-
DIMENSIONAL PRINTING" by James F. Bredt et al., incorporated herein by reference.

10 Field of the Invention

This invention relates generally to rapid prototyping techniques, and more
particularly to three dimensional printing materials, methods, and articles made
therefrom.

15 Background of the Invention

The field of rapid prototyping involves the production of prototype articles and
functional parts, as well as ceramic shell molds for metal casting, directly from
computer-generated design data.

20 Two well-known methods for rapid prototyping include a selective laser sintering
process and a liquid binder three dimensional printing process, as exemplified by U.S.
Pat. No. 5,204,055. The techniques are similar to the extent that they both use layering
techniques to build three-dimensional articles. Both methods form successive thin cross
sections of the desired article. The individual cross sections are formed by bonding
together grains of a granular material on a flat surface of a bed of the granular material.
25 Each layer is bonded to a previously formed layer to form the desired three-dimensional
article at the same time as the grains of each layer are bonded together. The laser-
sintering and liquid binder techniques are advantageous because they create parts directly
from computer-generated design data and can produce parts having complex geometries.
Moreover, three-dimensional printing methods can be quicker and less expensive than
30 conventional machining of prototype parts or production of cast or molded parts by
conventional "hard" or "soft" tooling techniques which can take from a few weeks to
several months, depending on the complexity of the item.

Three-dimensional printing methods have been used to make ceramic molds for investment casting, thereby generating fully-functional metal parts. Additional uses have been contemplated for three-dimensional printing methods.

For example, three-dimensional methods may be useful in design-related fields where the articles may be used for visualization, demonstration and mechanical prototyping. It may also be useful for making patterns for molding processes. Three-dimensional printing methods may be further useful, for example, in the fields of medicine and dentistry, where expected outcomes may be modeled prior to performing procedures. Other businesses that could benefit from rapid prototyping technology include architectural firms, as well as others in which visualization of a design is useful.

A selective laser sintering process is described in U.S. Pat. No. 4,863,568, which is incorporated herein by reference. The selective laser sintering process was commercialized by DTM Corporation. The selective laser sintering process involves spreading a thin layer of powder onto a flat surface. The powder is spread using a tool developed for use with the selective laser sintering process, known in the art as a counter-rolling mechanism (hereinafter "counter-roller"). Using the counter-roller allows thin layers of material to be spread evenly, without disturbing previous layers. After the layer of powder is spread onto the surface, a laser directs laser energy onto the powder in a predetermined two-dimensional pattern. The laser sinters or fuses the powder together in the areas struck by its energy. The powder can be plastic, metal, polymer, ceramic or a composite. Successive layers of powder are spread over previous layers using the counter-roller, followed by sintering or fusing with the laser. The process is essentially thermal, requiring delivery by the laser of a sufficient amount of energy to sinter the powder together, and to previous layers, to form the final article.

25 The selective laser sintering process is expensive due to the high cost of the laser and the complexity of the equipment used. In addition, only one laser is used at a time, making it a slow method. In addition, depending on the application, materials are sometimes used in the selective laser sintering method that require special handling or processing facilities.

U.S. Pat. No. 5,204,055, incorporated herein by reference, describes an early three-dimensional printing method which involves the use of an ink-jet printing head to deliver a liquid or colloidal binder material to layers of powdered material. The technique (hereafter “liquid binder method”) involves applying a layer of a powdered

material to a surface using a counter-roller. After the powdered material is applied to the surface, the ink-jet printhead delivers a liquid binder to the layer of powder. The binder infiltrates into gaps in the powder material, hardening to bond the powder material into a solidified layer. The hardened binder also bonds each layer to the previous layer. After
5 the first cross-sectional portion is formed, the previous steps are repeated, building successive cross-sectional portions until the final article is formed. Optionally, the binder can be suspended in a carrier which evaporates, leaving the hardened binder behind. The powdered material can be ceramic, metal, plastic or a composite material, and can also include fiber. The liquid binder material can be organic or inorganic.
10 Typical organic binder materials are polymeric resins, or ceramic precursors such as polycarbosilazane. Inorganic binders are used where the binder is incorporated into the final articles; silica is typically used in such an application.

One advantage of using an ink-jet print head rather than a laser is that inexpensive printheads are commercially available that have a plurality of spray nozzles
15 that can be used to deliver binder to the powder and that are arranged side-by-side in a single print head. In selective laser sintering machines, only one laser, which delivers energy to the powder, is conventionally used. The combination of several spray nozzles increases the speed of liquid binder printing compared to laser-sintering by allowing a wider area to be printed at one time. In addition, the liquid binder printing equipment is
20 much less expensive than the laser equipment due to the high cost of the laser and the high cost of the related beam deflection optics and controls.

The liquid binder printing technique has a serious reliability problem associated with the spray nozzles becoming clogged with the binder and/or powder material. Clogging occurs when binders having high levels of suspended solids are used. The
25 problem with clogging requires frequent interruptions of the build in order to clean the spray nozzle. The clogging problem increases the time and labor required to build parts and to maintain the equipment. Therefore, although the liquid binder printing technique represents an advance in speed and cost over the selective laser sintering process, it suffers from reliability problems that slow down the build rate, increasing labor and
30 equipment maintenance costs. This problem interferes with the potential speed advantage of increased printing capability presented by the plurality of spray nozzles.

In addition to the above-mentioned disadvantages, the powders, especially metallic powders, used in both selective laser sintering and liquid binder techniques

09706350-110300

These safety issues may require special clothing and processing facilities to prevent, for example, skin contact or inhalation of toxic materials. In addition, more expense may be incurred through complying with regulations for the disposal of toxic materials. For these reasons, these techniques do not lend themselves to being used in typical office environments, such as architectural and design firms, or doctors' offices.

U.S. Patent No. 5,639,402, to Barlow discloses a method for selectively fusing calcium phosphate particles that are coated, or alternatively mixed with, a polymeric binder material.

The present invention is directed to improved materials systems and methods for
15 producing appearance models, small numbers of functional parts, etc. in an office
environment.

One embodiment provides a first layer of dry particulate material comprising an ionic reactant and dispensing a homogeneous fluid onto a first region of the first layer, the fluid comprising an ionic reactant. An ion exchange reaction is allowed to occur between the particulate reactant and the reactant in the fluid, the reaction causing a solidified material to form in the first region.

One embodiment provides a first layer of a dry particulate material comprising a reactant selected from the group consisting of metals, minerals and ceramic oxides. A homogeneous fluid is dispensed onto a first region of the first layer, the fluid comprising a reactant. A reaction is allowed to occur between the particulate reactant and the reactant in the fluid, the reaction causing a solidified material to form in the first region.

One embodiment provides a first layer of a dry particulate material comprising a particles having a reactive surface. A fluid is dispensed onto a first region of the first

One embodiment provides a first layer of a dry particulate material comprising a reactant. A fluid is dispensed onto a first region of the first layer, the fluid comprising a reactant capable of hydrogen-bonding with the particulate reactant.

One embodiment provides a first layer of a dry particulate material. A first fluid is dispensed, the first fluid comprising an adhesive and a second fluid comprising a cross-linking agent onto a first region of the first layer. A cross-linking reaction is allowed to occur, the reaction causing a solidified material to form in the first region.

One embodiment provides a first layer of a dry particulate material. The method further comprises dispensing a first fluid comprising a first reactant and a second fluid comprising a second reactant onto a first region of the first layer. A reaction is allowed to occur between the first and second reactants to form an adhesive.

One embodiment provides a first layer of a dry particulate material. The method further comprises dispensing a fluid monomer onto the first layer and dispensing a fluid comprising an initiator onto a first region of the first layer. A polymerization is allowed to occur, the polymerization causing a solidified material to form in the first region.

One embodiment provides providing a first layer of a dry particulate material comprising a first reactant and a second reactant. A fluid is dispensed onto a region of the first layer. A reaction is allowed to occur between the first and second reactants, the

reaction causing a solidified material to form in the first region.

These and other features, aspects and advantages of the present invention will become better understood with reference to the following description and appended claims.

5

Brief Description of the Drawings

FIG. 1 illustrates schematically a first layer of a mixture of particulate material deposited onto a downwardly movable surface on which an article is to be built, before any fluid has been delivered;

10 FIG. 2 illustrates schematically an ink-jet nozzle delivering a fluid material to a portion of the layer of particulate material of FIG. 1 in a predetermined pattern;

FIG. 3 illustrates schematically two ink-jet nozzles delivering two fluid materials to a portion of the layer of particulate material of FIG. 1 in a predetermined pattern;

15 FIG. 4 illustrates schematically a view of a final article made from a series of steps illustrated in FIGS. 1-2 or 1-3 enclosed in the container while it is still immersed in the loose particles; and

FIG. 5 illustrates a view of the final article from FIG. 4.

Detailed Description

20 The present invention is now illustrated by describing several aspects and embodiments thereof. One group of embodiments employs two-component materials systems which are applicable to a printing process in which a fluid is dispensed in a predetermined pattern on a layer of dry particulate material.

25 The majority of prior art three dimensional printing systems employ a one-component materials system. Here, one primary chemical component is responsible for the solidification process which is often aided by exposure of the primary component to an external energy source or applied stimulus, such as UV radiation, microwave radiation, infra-red radiation, or heat.

30 In the illustrative two-component systems, two chemical reactants are present in either the dispensing fluid, the particulate layer or both, and chemically react to initiate hardening in a region of the desired predetermined pattern. The two component materials systems present several advantages: (1) The reactants can be judiciously chosen to cause an instantaneous chemical reaction which can result in spontaneous

hardening in the patterned region; (2) An extra processing step is eliminated -- spontaneous hardening avoids the need for exposing the patterned material to an external energy source or an applied stimulus, thus facilitating and speeding up manufacture of the prototype article; and (3) A wider array of different binder and adhesive materials can
5 be present in the final product due to the almost infinite number of chemical reactions possible, as opposed to limiting the choice of adhesives and binders to common, commercially available materials.

The illustrative embodiments of this aspect of the present invention include two-component materials systems and methods which fall under three general classes: (1) a
10 first reactive component in the dispensing fluid and a second reactive component present in a dry particulate layer; (2) two reactive components dispensed as a fluid; and (3) two reactive particulate components in which a dispensing fluid functions to dissolve or disperse the reactants.

These methods have the following in common: providing a dry particulate layer,
15 dispensing a fluid onto the particulate layer, and allowing a reaction to occur. The fluid is dispensed as a predetermined pattern resulting in a the fluid being present in a first region of the particulate layer. A chemical reaction occurs in the first region of the layer instantaneously and spontaneously. A chemical reaction eliminates the need for a subsequent step of curing the material, e.g. by exposing the material to an external
20 energy source or applied stimulus because it is this chemical reaction which causes solidification of the material in the first region. In some cases, curing may be desired. The first region of solidified material is contiguous with a second region of free-flowing particulate material. The chemical reaction results from the two components chemically reacting with each other. "Chemically react," as used herein, results in the dissociation
25 and/or formation of chemical bonds such as covalent bonds, ionic bonds, ionic interactions, hydrogen bonding interactions, and the like. "Solidification," "solidifying," "harden," and "hardening," as used herein, may mean any number of processes that achieve the formation of an integral solid structure (non-pourable) from the dry, free-flowing (pourable) particulate material and the fluid, including, but not limited to,
30 dissolving, evaporating, chemically reacting, activating, free radical initiator curing, binding, adhering, polymerizing, crystallizing, and other transformative processes, including catalyzed processes. Those of skill in the art will recognize that various similar processes can achieve similar results.

Rarely is an entire article printed with only one layer, although this is possible. More commonly, the three dimensional printing method includes the steps of building the article in successive layers. Accordingly, the method further comprises providing a second layer of the dry particulate material over the first layer. The second layer is
5 generally applied soon after fluid has been dispensed onto the first layer. The fluid is then dispensed onto a first region of the second layer and subsequent layers of the particulate material are deposited over a preceding layer followed by the step of dispensing the fluid.

For optimal adherence and/or bonding between the layers, the pattern on the first
10 layer should maintain its "wetness" at the time the second layer is deposited on the first layer. After patterning of the second layer, relatively simultaneous solidification of adjacent patterned regions results in a more integral association between the first and second layer where the respective patterned regions contact each other. The less optimal situation occurs where solidification of the patterned region in the first layer occurs prior
15 to deposition of the second layer. However, for certain compositions, this may be sufficient to provide sufficient inter-layer structural integrity.

The predetermined pattern of a layer may be the same or different from that of an adjacent layer, or any other layer. It is readily understood that in order to form an integral three-dimensional article, at least one portion of a region of the predetermined
20 pattern in one layer must contact at least a portion of the patterned region in an adjacent layer or layers. The pattern for each layer is inputted from a computer. The accumulation of external surfaces of each pattern represents a three dimensional model in computer memory.

The final shape of the three-dimensional article is defined by the collective
25 contours of each of the layers. Structural aspects (i.e. strength, stiffness, and so on) are only relevant in so far as they maintain the external shape of the part. This is in contrast to drywall and paper cups which are typically molded from a single sheet or a pressed stack of sheets. Such functional materials demand more than mere visualization. The mechanical properties of these products are required to support loads and stresses from
30 actual use, i.e. supporting a structure or containing a solid or liquid. In addition, sheet-forming and lamination processes have different assembly procedures from 3-D printing. In sheet-forming processes for functional finished articles of manufacture, the sheets are initially assembled edge-to-edge, and the viewable surface is simply the broad side of the

sheet. Three-dimensional printing, in contrast, unites faces of thin layers to form a stack, the layers having a predetermined contour. The viewable surface of a three-dimensional printed article comprises layer edges only, save for the uppermost and lowermost layers in certain cases.

5 In embodiments of the present invention, the printed three-dimensional article is also known as a “prototype article,” which as used herein, is meant to define a relatively easily produced model, such as representations of a bone, or a representation of a production part, such as a gear, bearing, shaft, etc., made of material completely different from that which the production part is made, for purposes of simplicity, speed, and
10 economy. A prototype article is typically made for visualization purposes only and structural integrity of the prototype article usually does not meet the requirements needed for the corresponding functional article.

Liquid/Solid Reactive Component Systems

15 The following embodiments relate to the first class of two-component systems in which a first reactant is present in the particulate material and a second reactant is present in the dispensing fluid.

In one embodiment, the method of three-dimensional printing provides a first layer of dry particulate material comprising an ionic reactant. “Ionic reactant” as used
20 herein refers to a charged species (or electrostatically charged species) neutralized by a counterion. Examples of ionic reactants include salts, acids and bases or any other such ionically-bonded compounds. The layer of particulate material comprising the ionic reactant can be a layer of particulate ionic reactant only or a mixture of particulate ionic reactant and an inert filler. Examples of inert fillers are described more fully below. A
25 homogeneous fluid is dispensed onto a first region of the first layer, the fluid comprising an ionic reactant. “Homogeneous fluid” as used herein refers to the liquid state. In this embodiment, the homogeneous fluid can comprise a liquid reactant in pure form or miscible with another fluid, typically an inert fluid. Alternatively, the ionic reactant can be a solid which is soluble in a fluid, typically an inert fluid. In either case, the inert
30 fluid is most often a solvent, such as an organic solvent or water.

In this embodiment, an ion exchange reaction is allowed to occur between the particulate reactant and the reactant in the fluid, both reactants being ionic reactants. An “ion exchange” reaction as used herein results in ionic reactant having a different

counterion after the ion exchange. Preferably, the one ionic reactant comprises a cation or anion of interest which is to be ultimately combined with the second ionic reactant having a corresponding anion or cation of interest, ultimately forming the desired ionically-bonded compound. The respective counterions not of interest also combine to
5 form a salt, acid or base. The ion exchange is facilitated or made possible in the presence of the fluid, which not only provides one of the ionic reactants but also functions to dissolve the ionic reactants to facilitate or make possible the ion exchange reaction. Thus, the fluid provides a medium through which the electrostatic charges on the particulate material may interact with the ionic reactant in the fluid. Formation of the
10 desired ionically-bonded compound causes a solidified material to form in the first region of the first layer.

In one embodiment, the ionic reactant in the fluid is an electrolyte which can be a small molecule or a polymer having multiple charged sites, i.e. a polyelectrolyte. The particulate reactant can be soluble or insoluble in the fluid. Examples of soluble
15 particulate cationic polyelectrolytes include polyallylamine hydrochloride, polybutylaminoethyl methacrylate, polyethyleneimine, polyvinyl pyridine and polydiallyldimethylammonium chloride. Examples of insoluble cationic polyelectrolytes include Empresol N, Unicat KC1420, Unicat C3T (all from Kalamazoo Paper Chemicals), Pencat 600, Apollo 4280 (from Penford Corp) and aminosilane-
20 functionalized glass beads. For these examples, the reactant in the fluid is a soluble anionic reactant such as sulfonated polystyrene, polyacrylic acid (PAA), polymethacrylic acid (PMAA), polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of polyvinylsulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt
25 of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium styrene sulfonate with maleic anhydride (Versa TL-3 from Alco Chemicals).

The examples of anionic reactants in the fluid can also be provided as the particulate reactant. Alternatively, the particulate reactant can be an insoluble anionic reactant such as Astro-gum 3010 or Astro-gum 21. Accordingly, the reactant in the fluid
30 is a soluble cationic reactant, such as any of those listed above.

Any concentration of polyelectrolyte in the fluid material may be used with the electrostatically charged particulate material of the present embodiment. A polyelectrolyte concentration of about 3% has been found suitable in some instances.

Other suitable polyelectrolytes include, but are not limited to, PMAA, poly(styrene sulfonate, sodium salt) (PSS), (PAA), and poly(diallyldimethylammonium chloride) (PDAC). Preferred polyelectrolytes include PMAA (6,000 molecular weight, 5 30% aqueous solution, available from Aldrich Chemicals), PAA powder (2,000 molecular weight available from Fluka), PSS powder (mw 70,000, available from Aldrich Chemicals), and PDAC (20% aqueous solution, mw ~150,000, available from Aldrich Chemicals).

The electrostatically charged materials may be mixed in any ratio. Suitable ratios 10 have been found to be about a 1:1 ratio based on the charge density of each component. Suitable cationically charged materials include cationically charged starches and polymers containing quaternary amines. Preferred cationically charged starches include, but are not limited to, Empresol N (Kalamazoo Paper Chemicals, Kalamazoo Mich.), Apollo 4280 and Pencat 600 (available from Penford Products Co., Cedar Rapids, Iowa). 15 Suitable anionically charged materials include anionically charged starches and polymers containing sulfonate, phosphate, and carboxylic acid groups. Preferred anionically charged starches include, but are not limited to, Astro Gum 3010 and Astro Gum 21 (available from Penford Products Co., Cedar Rapids, Iowa).

Preferred material systems according to the present embodiment include, but are 20 not limited to, a mixture of an aqueous fluid with any one of a particulate material that includes the following combinations: sodium polystyrene sulfonate and a cationic starch; polycationic and polyanionic powders; and, anionic polymers and polyvalent salts.

Another embodiment of the present invention provides a method including the step of providing a first layer of a dry particulate material in which at least a portion of 25 the particulate material comprises particles having a reactive coating. This embodiment widens the scope of possible reactive particles. Certain reactive groups may not have been accessible as pure particles, or the solid form was not structurally stable. However, a solution of such reactive groups can be coated onto an inert particle, resulting in an effectively reactive particle. The coating process can be performed by spraying a 30 solution or pure liquid of reactive groups onto an inert particle or dipping the inert particle into the reactive group solution or pure liquid. The resulting particle may comprise reactive groups adsorbed on the surface of the particle or covalently bonded to the surface of the particle. "Inert" in this instance refers to inertness with respect to the

reaction resulting in solidification for the printing. Thus, an inert particle can be surface-derivatized to result in covalently bound reactive groups, and this can be achieved by methods known particularly in the field of manufacturing derivatized chromatographic materials.

5 The layer of particulate material can be a pure collection of particles having reactive coatings, or a mixture of inert particles and the particles having reactive coatings. Examples of groups which can form a reactive coating include phenolic precursors, vinyl groups, acids, bases, isocyanates, cyanoacrylates, epoxides, amines, carboxylic acids, hydroxyl groups, acetates, amides and esters.

10 In one embodiment, a reaction is allowed to occur between the reactive coating and a reactant in the fluid, in which the reaction causes a solidified material to form in the first region. The reaction can be any of the chemical reactions described herein.

 The reactive coatings can be reacted with reactants in the fluid or with soluble reactants in the particulate material.

15 For example, the reactive coating and the reactant in the fluid can be a charged species and the resulting reaction is an ion-exchange reaction as discussed above. Thus, the coating can be anionic or cationic, and can include any of the soluble anionic or cationic reactants listed herein. Accordingly, the reactant in the fluid will be an ionic reactant of opposing charge. Additionally, coatings that react with soluble cationic
20 reactants include acids, carboxylic acids, and adsorbed anionic polyelectrolytes. Coatings that react with soluble anionic reactants include bases, amines, hydroxyl groups, and adsorbed cationic polyelectrolytes. The reaction can be an acid/base reaction in which the reactive coating provides the fluid-soluble acid or base.

 Alternatively, a hydrogen-bonding reaction can occur in which the reactive
25 coating can be any hydrogen-bond donor or acceptor listed herein. Additionally, coatings that react with hydrogen-bond donors carboxylic acids, oxides, isocyanates, epoxides, acetates, amides, esters, and adsorbed hydrogen-bond acceptors. Coatings that react with H-bond acceptors include acids, amines, carboxylic acids, hydroxyl groups, alcohols, amides, and adsorbed hydrogen-bond donors.

30 The reactive groups can provide a catalyst and the reactant in the fluid can be a monomer in which the ensuing reaction is a polymerization catalyzed by any of a variety of polymerization catalysts including ionic (cationic or anionic) or free-radical initiators (examples of monomers and initiators are described and listed herein). The reaction can

involve covalent bond dissociation and/or formation. Coatings that can participate in polymerization reactions include any of the monomers listed herein, including vinyl groups, cyanoacrylates, epoxies, and amines. An appropriate initiator (cationic- or free-radical) is present in the particulate material.

5 Such coatings may also be desirable, for example, to improve adhesion.

Another embodiment of the present invention provides a method including the step of providing a first layer of a dry particulate material comprising a reactant such as metals, minerals and ceramic oxides. A fluid is dispensed onto a first region of the first layer in which the fluid comprises a reactant allowing a reaction to occur between the
10 particulate reactant and the reactant in the fluid, the reaction causing a solidified material to form in the first region.

This embodiment exploits the reactive nature of metals, minerals and ceramic oxides in conjunction with fluid reactants such as polymers. The polymer can be cross-linked by the metal, mineral or ceramic oxide. The polymer can be capable of an ion
15 exchange reaction with the metal, mineral or ceramic oxide. Alternatively, the reaction can be a neutralization reaction, causing precipitation and/or cross-linking to occur, resulting in the solidification.

Examples of reactants in the fluid include sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid,
20 alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyvinylsulfonic acid, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium styrene sulfonate with maleic anhydride. As a more specific example, polyacrylic acid is capable of oxidizing a metal such as iron or copper, to a salt
25 of the acid (e.g. iron polyacrylate). The metal polyacrylate forms a solid film on the surface of the particles. The metal cations can diffuse about the acidic solution with the effect of solidifying the polyacrylic acid.

Examples of metals include iron, copper, carbon steel, stainless steel, aluminum, brass, molybdenum, tungsten, magnesium, and cobalt.

30 Examples of ceramic oxides include alumina (Al_2O_3), anatase (TiO_2), silicon dioxide, aluminum silicate and glass.

Example of minerals include limestone(CaCO_3), magnetite, calcium silicate (CaSiO_4), hydrous calcium sulfate ($\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$), hydrated lime ($\text{Ca}(\text{OH})_2$) and

calcium phosphate.

Another embodiment of the present invention provides a method including the step of providing a first layer of a dry particulate material comprising a reactive surface. A fluid is dispensed onto a first region of the first layer, in which the fluid comprises a reactant. A reaction is allowed to occur between the reactive surface and the reactant in the fluid, the reaction causing a solidified material to form in the first region. The reactive surface can comprise an inert particle having a reactive coating or an entire particle that is reactive.

Examples of reactive polymers include those having polyol groups which can react with isocyanate reactants in the fluid. An ion exchange reaction can occur between sodium polystyrene sulfonate particles and cationic polyelectrolytes in the fluid, such as any of the cationic polyelectrolytes previously mentioned.

Alternatively, the reaction can be a polymerization reaction in which an initiator is present in the fluid and the particulate material further comprise a monomer that is soluble in the fluid. Examples of such monomers include vinylic monomer, an acrylic monomer and a dienic monomer. Other monomers include acrylic acid, methacrylic acid, acrylamide and styrene. Examples of initiators include potassium persulfate, ammonium persulfate, sulfuric acid, perchloric acid, fluorosulfonic acid, trifluoromethylsulfonic acid, trifluoroacetic acid, tin tetrachloride, aluminum trichloride, and boron trifluoride, potassium peroxodisulfate, ammonium persulfate with N,N,N',N'-tetramethylethylenediamine (TMEDA), 3-dimethylaminopropionitrile (DMAPN), potassium persulfate with 4,4'-azobis(4-cyanovaleric acid), dibenzoyl peroxide, t-butyl perbenzoate and azobisisobutyronitrile.

Where the particle is a reactive polymer examples include an unsaturated polyester, polybutadiene, polyisoprene, an unsaturated polyurethane and copolymers thereof.

Examples of reactive coatings or reactive particles include sodium polystyrene sulfonate, sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of polyvinylsulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium styrene sulfonate with maleic anhydride.

Another embodiment of the present invention exploits hydrogen bonding reactions that result in solidification of the particulate material. In this embodiment, a method includes the step of providing a first layer of a dry particulate material comprising a reactant and dispensing a fluid onto a first region of the first layer. The fluid comprising the reactant is capable of hydrogen-bonding with the particulate reactant. Hydrogen bonding is allowed to occur between the particulate reactant and the reactant in the fluid, in which the hydrogen bonding causes a solidified material to form in the first region.

In one embodiment, the particulate material comprises a particulate reactant which is soluble in the fluid. The particulate reactant can either be a hydrogen-bond donor or hydrogen-bond acceptor and the corresponding reactant in the fluid is a hydrogen-bond acceptor or a hydrogen-bond donor. Examples of hydrogen-bond acceptors and donors are listed herein.

Examples of adhesive/cross-linking agent combinations include polyvinyl alcohol/Borax, polyvinyl alcohol/polyethylene oxide and polyethylene oxide/polymethacrylic acid.

In the preceding examples, at least one of the reactants in itself has properties of an adhesive. Another embodiment of the present invention provides a method by which the neither of the reactants has properties of an adhesive, but rather an adhesive is formed upon reaction of the two reactants. The method includes the step of providing a first layer of a dry particulate material comprising a reactant a fluid is dispensed onto a first region of the first layer, in which the fluid comprises a reactant. A reaction is allowed to occur between the particulate reactant and the reactant to form an adhesive. Formation of the adhesive, (or occurrence of the reaction) causes a solidified material to form in the first region.

Examples of reactant in the fluid include 2-amino-2-methyl 1-propanol (AMP), 2-amino-2-methyl 1-3 propanediol (AMPD), 2-amino-2-ethyl 1-3-propanediol (AEPD), and a hydroxide. Specific hydroxides include sodium hydroxide, potassium hydroxide, and ammonium hydroxide. Examples of particulate reactants which can react with these listed examples of reactants in the fluid include a copolymer of octacrylamide/acrylates/butylaminoethylmethacrylate, e.g. Amphomer LV 71 (National Starch & Chemical, Bridgewater, NJ). An additional benefit of such systems is the ability to self cross-link.

Other combinations include particulate reactants such as urea, a phenolic resin and melamine in which corresponding reactants in the fluid can be formaldehyde.

Liquid/Liquid Reactive Component Systems

5 The following embodiments relate to the second class of two-component systems in which a first reactant and second reactant is present in the dispensing fluid. In general, the first and second reactants are provided in separate dispensing fluids due to their propensity to react with each other. The two reactants can be applied simultaneously or successively. Both reactants can be patterned on the layer, or one
10 reactant can be applied throughout the particulate layer thereby wetting the particulate material. The other layer can be printed on the wetted particulate material such that solidification occurs only on the printed region of the layer. The dispensing fluids are homogeneous fluids, as described previously.

For example, when two fluid materials are used, they may each include one part
15 of a two-part adhesive that react together to form an adhesive, which then hardens to form an essentially solid article that includes any remaining particulate material. A specific example of such a system is a two-part epoxy adhesive or structural acrylic, in which the both parts are fluid and are dispensed through separate print-head nozzles.

Both fluids are patterned on the dry particulate layer, either successively or
20 simultaneously through multiple print heads. This avoids a wasteful process of wetting the entire layer with a fluid. Wetting the entire layer may also increase toxicity of the process.

Another embodiment of the present invention provides a method including the step of providing a first layer of a dry particulate material. The method also involves
25 dispensing a first fluid comprising an adhesive and a second fluid comprising a cross-linking agent onto a first region of the first layer. A cross-linking reaction is allowed to occur in which the reaction causes a solidified material to form in the first region.

For example, the adhesive can be polyvinyl alcohol and the cross-linking agent can be sodium tetraborate ($\text{Na}_2\text{B}_4\text{O}_7$), e.g. Borax.

30 Another embodiment of the present invention exploits hydrogen-bonding interactions caused by two reactants in the fluid. A first fluid comprising a hydrogen-bond donor and a second fluid comprising a hydrogen-bond acceptor is dispensed onto a first region of a first layer of a dry particulate material. The method further comprises

Examples of hydrogen-bond donors and acceptors include those described herein.

As an example the first reactant can be an isocyanate such as Bayhydur XP-7063 (Bayer) and the second reactant can be a polyol. Examples of polyols include glycerol, sorbitol, erythritol and polyvinyl alcohol.

25 Thus, the particulate adhesive must be soluble in the first fluid. The first fluid can be a pure fluid such as a solvent or water, or it can be a solution such as an acidic or basic solution. Alternatively, the adhesive can react with the first fluid to form another reactive species.

An example of a soluble particulate adhesive is octacrylamide/acrylates/butylaminoethylmethacrylate, e.g. Amphomer and an example of a first fluid capable of dissolving this adhesive includes aqueous solutions of 2-amino-2-methyl-1-propanol (AMP) and potassium hydroxide. The solidification agent can be an acid such as hydrochloric acid, citric acid, succinic acid and adipic acid which

neutralizes the soluble adhesive and causes subsequent precipitation. A polymeric acid such as polyacrylic acid (PAA) or polymethacrylic acid (PMAA) can both neutralize and crosslink the adhesive.

Another embodiment of the present invention takes advantage of polymer formation to harden a region of the particulate layer. The ensuing polymer does not need to be a known adhesive per se. Rather it is the formation of the polymer matrix supporting the particulate material which causes hardening of the patterned region in the layer. Accordingly, this method provides a first layer of a dry particulate material. A fluid monomer is dispensed onto the first layer. A fluid comprising an initiator is dispensed onto a first region of the first layer. Polymerization is allowed to occur, in which the polymerization causing a solidified material to form in the first region.

The initiator can be a cationic or a free-radical initiator. Examples of cationic initiators include sulfuric acid, perchloric acid, fluorosulfonic acid, trifluoromethylsulfonic acid, trifluoroacetic acid, tin tetrachloride, aluminum trichloride, and boron trifluoride. Monomers which can be polymerized with these examples of initiators include isobutene, alkenes, alkyl-vinyl ethers, vinylacetals, dienes, styrene, N-vinyl carbazole, beta-pinene, oxiranes, N-substituted aziridines, lactams and oxazolines.

Examples of a free-radical initiator include potassium peroxodisulfate, ammonium persulfate with N,N,N',N'-tetramethylethylenediamine (TMEDA) or 3-dimethylaminopropionitrile (DMAPN), potassium persulfate with 4,4'-azobis(4-cyanovaleric acid), dibenzoyl peroxide, t-butyl perbenzoate and azobisisobutyronitrile. Monomers which can be polymerized with these examples of initiators include vinylic monomers, acrylic monomers, dienic monomers, acrylic acid, methacrylic acid and acrylamide.

Solid/Solid Reactive Component Systems

The following embodiments relate to the second class of two-component systems in which a first reactant and second reactant is present in the layer of particulate material. A fluid dispensed onto this layer can dissolve either one or both of the solid reactants. The fluid is a homogeneous fluid, as described previously.

Accordingly, one embodiment of the present invention provides a method providing a first layer of a dry particulate material comprising a first reactant and a second reactant. A fluid is dispensed onto a region of the first layer. A reaction between

the first and second reactants is allowed to occur, in which the reaction causes a solidified material to form in the first region.

In one embodiment, the fluid dissolves both the first and second reactant. The reaction can be an ion-exchange reaction in which the first reactant can be any of the
5 soluble cationic or anionic reactants described herein and correspondingly, the second reactant can be a soluble ionic reactant having a charge opposite that of the first reactant. The second reactant also can be any one of the soluble cationic or anionic reactants described herein. An example includes a powder of
10 acrylonitrile/butadiene/styrene copolymer coated with sodium polystyrene sulfonate and blended with a cationic polyelectrolyte. In this combination, the coating on the polymer particles can react with the cationic polyelectrolyte.

Alternatively, the first and/or second reactant can comprise an inert bead coated with a solution comprising any of the soluble anionic or cationic polyelectrolytes mentioned previously.

15 Other examples include amine-functionalized glass beads reacting with an anionic polyelectrolyte, and tosylate-functionalized carbon black reacting with a cationic polyelectrolyte in dry form in the powder, or epoxy-functionalized glass beads with amines in dry form in the particulate material, or powders coated with any adhesive listed herein.

20 Alternatively, the first and second reactants can be soluble hydrogen donors and hydrogen acceptors respectively, as described herein.

In another embodiment, one of the reactants is insoluble in the fluid and the other reactant is soluble in the fluid.

In one embodiment, the first reactant is a metal, a ceramic oxide or mineral that is
25 capable of reacting with a particulate polymer that is soluble upon dispensing the fluid and is capable of solidification upon reaction with the metal, metal oxide or ceramic. Alternatively, the particulate polymer can be an inert bead coated with a soluble reactive polymer capable of solidification. Examples of soluble particulate polymers include sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid,
30 alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium styrene sulfonate with maleic anhydride. As a more specific

example, polyacrylic acid is capable of oxidizing a metal such as iron or copper, to a salt of the acid (e.g. iron polyacrylate). The metal polyacrylate forms a solid film on the surface of the particles. The metal cations can diffuse about the acidic solution with the effect of solidifying the polyacrylic acid.

- 5 Specific examples metals and oxide ceramics which react with acid
polyelectrolytes in dry particulate material. Polystyrene sulfonate or sodium
polystyrene sulfonate copolymerized with maleic anhydride (Versa TL-3 from Alco
Chemicals) or any of the polyelectrolytes mentioned previously can be present in the
particulate material and which are soluble in a fluid of an acid such as acetic acid or HCl
10 could react with metals, ceramic oxides or minerals as listed herein.

Particulate Materials

- For purposes of the present invention, "particulate material" is meant to define
any material containing significant amounts of particulate material. The particulate
15 material may react with, be soluble in, or interact with the fluid material, or any portion
thereof, depending upon the particular embodiment of the invention that is being
practiced. For example, in certain embodiments, it may be desirable that the particulate
material dissolve in the fluid material. Similarly, in other embodiments it may be
desirable that the particulate material chemically react with the fluid material. In yet
20 other embodiments, it may be desirable that the fluid and particulate material interact to
the degree that the fluid material, or a portion thereof, hardens around at least a portion
of the particulate material.

- Generally, the size of the particles in the particulate material is limited by the
thickness of the layers to be printed. That is, the particles are preferably approximately
25 smaller than the thickness of the layers to be printed. The particulate materials may have
any regular or irregular shape. Using smaller particles may provide advantages such as
smaller feature size, the ability to use thinner layers, and the ability to reduce what is
known in the art as a "stair stepping" effect. In preferred embodiments, the material
systems include particulate material having particles with a mean diameter ranging from
30 about 1 μm to about 300 μm , preferably ranging from about 2 μm to about 100 μm ,
preferably ranging from about 10 μm to about 300 μm , more preferably ranging from
about 10 μm to about 100 μm , and more preferably ranging from about 10 μm to about
50 μm .

The particulate material can include inert particles. The inert particles or any portion of the particulate material can comprise granular, powdered or fibrous materials.

Classes of inert particles include a polymer, a ceramic, a metal, an organic material, an inorganic material, a mineral, clay and a salt.

5 Examples of inert polymers include poly(methyl methacrylate), polystyrene, polyamide, polyester, a latex, polyethylene, polypropylene, polyurethane, polyvinyl chloride, polyvinyl acetate, cross-linked polyvinyl pyrrolidone, hydrophilic polyurethane, poly(ethylene terephthalate), thermoplastic urethane, styrene-acrylonitrile copolymer, thermoplastic polyolefin, an epoxy-based polymer, polyether, polyamine, a
10 polyacid, a polycarbonate, a vinyl polymer, an aromatic polyamide, a diene polymer, poly(phenylene oxide), polysiloxane, polynorbornene, polyisoprene, a polyphenylene ether, styrene-butadiene block copolymer, acrylonitrile-butadiene-styrene, high impact polystyrene and copolymers thereof.

 Examples of inert ceramics include gypsum, limestone, clay, aluminum oxide,
15 aluminum silicate, calcium silicate, silicon dioxide, titanium dioxide, glass, iron oxide, zinc oxide, magnetite, aluminum hydroxide, magnesium oxide, calcium phosphate, zirconium silicate, silicon carbide, boron nitride, boron carbide and borosilicate.

 Examples of inert organic materials include starch, cellulose, wood powder, wax, resin, bone, protein, carbohydrates, sugars, textile fibers and dietary fibers.

20 Examples of inert salts include sodium carbonate, sodium bicarbonate, sodium borate, sodium chloride, sodium sulfate, potassium sulfate, potassium chloride, magnesium sulfate, magnesium chloride, potassium aluminum sulfate, sodium polyphosphate, sodium acetate, hydrous calcium sulfate, calcium phosphate, sodium silicate, and hydrated lime ($\text{Ca}(\text{OH})_2$).

25 Choosing a suitable particulate material for the material systems of the present invention involves various qualitative evaluations, which may easily be accomplished through routine experimentation by those of ordinary skill in the art. First, a small mound of particulate material is formed, a small depression is formed in the mound, and a small amount of fluid is placed in the depression. Visual observations are made
30 regarding, among other things, the rate at which the fluid diffuses into the particulate material, the viscosity of the particulate material introduction of the fluid, and whether a membrane is formed around the fluid. Next, line testing is performed by filling a syringe filled with fluid and strafing the mounds of particulate material. After a period of about

The particulate material may also be evaluated to determine the ease of spreading. Simple test parts may also be formed to determine, inter alia, the flexural strength, the distortion, the rate of hardening, the optimum layer thickness, and the optimum ratio of fluid to particulate material. Material systems suitable for use in the three-dimensional printing method include those hardening with minimal distortion, in addition to relatively high flexural strength. That is, hardened products with high flexural strength values may not be suitable for use in the three-dimensional printing method, if distortions compromise the accuracy of the final printed articles; this is especially applicable where relatively fine features are desired.

Various processing aids may be added to the particulate material, the fluid, or both, including, but not limited to, accelerators, adhesives, flowrate enhancers, humectants, and visible dyes, fiber, filler, and combinations thereof. Examples of these and other additives may be found in U.S. Patent 5,902,441.

Suitable particulate materials for the present material system include any of those described above. One preferred particulate material includes glass beads. Suitable glass beads range in size from about 10 to about 200 microns. Preferred glass beads include 70 micron diameter and 119 micron diameter glass beads (available under the product

name of Spheriglass #2530 and #2227, from Potters Industries Inc., Valley Forge, Pennsylvania). Another preferred particulate material includes glass beads coated with a coupling agent (available under the product name of Spheriglass #2530-CP-03 and #2227-CP-03 from Potters Industries Inc.). Preferably, the coupling agents are attached
5 to the glass beads using, for example, silane chemistry, which is well known to those of skill in the art.

In general, increasing the ratio of fluid to particulate material increases strength of the final article. Therefore, maximizing the amount of fluid printed to the particulate
10 material layer will generally increase the strength of the final article, but sometimes at the expense of increasing the amount and/or severity of distortions in the printed article. "Distortions," as used herein, includes, but is not limited to warping, caking, and bleeding. Consequently, the ratio of fluid to particulate material is practically limited by several factors, including the desired speed of printing, and the acceptable amount of
15 distortion in the final article. In order to prevent the nozzles from clogging, it may be desirable to include various processing aids in the fluid. Examples of these and other additives may be found in U.S. Patent 5,902,441, which is hereby incorporated by reference in its entirety.

Referring now to FIGS. 1 and 3, a schematic representation of a printing method
20 using the materials system of the present invention is presented. According to the method, a layer of particulate material 20 is applied on a downwardly movable surface 22 of a container 24. The layer of particulate material 20 may be formed in any manner, and preferably is applied using a counter-roller, which minimizes disruption of any previously applied layers. The thickness of an individual layer used to build the
25 prototype articles of the present invention preferably ranges from about 12 μm to about 1000 μm , more preferably from about 25 μm to about 250 μm , and more preferably still from about 80 μm to about 180 μm . In theory, there is no limit on the thickness of the layers of particulate material other than the capability of the equipment being used. In practice, the layers of particulate material are typically limited by the amount of fluid
30 that may be delivered to the layer, as described below.

FIG. 2 is a schematic representation of an ink-jet nozzle 28 delivering a plurality of droplets of a fluid 26 to a portion 30 of the layer 20 of the particulate material in a two-dimensional pattern. According to the method, the fluid 26 is delivered, or printed,

to the layer of particulate material in any predetermined two-dimensional pattern (circular, in the figures, for purposes of illustration only), using any convenient mechanism, such as a Drop-On-Demand (hereinafter "DOD") printhead driven by customized software which receives data from a computer-assisted-design (hereinafter
5 "CAD") system, a process which is known in the art. The first portion 30 of the particulate material layer and the fluid harden to form an essentially solid circular layer that becomes a rigid cross-sectional portion of the final article.

In some instances, the ink-jet nozzle 28 may be used to dispense two or more fluids simultaneously. In such instances, it is preferable that the fluids are mixed
10 together before being introduced into the nozzle.

FIG. 3 is a schematic representation of another embodiment of the method, in which a first ink-jet nozzle 28 delivering a plurality of droplets of a first fluid 26 and a second ink-jet nozzle 29 delivering a second fluid 27 to a portion 30 of the layer 20 of the particulate material in a two-dimensional pattern. As in the previous embodiment,
15 the fluids 26 and 27 are delivered, or printed, to the layer of particulate material in any predetermined two-dimensional pattern. Those of skill in the art will recognize that any number of ink-jet nozzles may be used to deliver fluid to the layer of particulate material, limited only by practical considerations. In the present embodiment, the fluids may be
20 described previously. When different fluid materials are used, it is necessary that the ink-jet print heads are in close enough proximity to allow the fluids to mix together on the surface of the particulate material.

In some instances, it may be desirable to print very small features. The size of features that may be printed is determined, in part, by the size of the droplets dispensed
25 from the nozzle. In general, smaller nozzles produce smaller droplets and smaller printed features. However, smaller nozzles reduce the printing speed, as the volume of fluid printed on the layer of particulate material decreases, and clogging may occur as well. Occurrences of nozzle clogging may be avoided by using larger nozzles, which dispense larger droplets. Again, the size of the nozzle and droplets may be practically
30 limited by the acceptable amount of distortion in the final article. Preferably, the individual droplets of fluid have a volume ranging from about 5 pl to about 200 pl. Commercially available print heads are available that provide droplet sizes in three ranges, typically from about 3 pl to about 25 pl, from about 40 pl to about 100 pl and

from 250 pl to about 5000 pl. Typically, the material systems and method of the present invention are capable of producing features on the order of about 75-125 μm , but smaller or larger features may be achieved by changing the droplet size.

Any loose particulate material 32 that was not exposed to the fluid remains loose
5 and free-flowing on the movable surface. "Loose" or "free-flowing" as used herein, refers to any unhardened or unsolidified particulate material. Preferably, the loose particulate material is left in place until formation of the final article is complete. Leaving the loose particulate material in place ensures that the article is supported during processing, allowing features such as overhangs, undercuts, and cavities (not illustrated,
10 but conventional) to be defined without using support structures. After formation of the first cross-sectional portion of the final article, the movable surface is indexed downward.

Using, for example, a counter-rolling mechanism, a second layer of particulate material is then applied over the first, covering both the rigid first cross-sectional portion
15 30, and any loose particulate material by which it is surrounded. A second application of fluid follows in any of the manners described above. Thus, the particulate material and fluid material in the newly printed layer harden, forming a second rigid cross-sectional portion added to the first rigid cross-sectional portion of the final article. The movable surface is again indexed downward.

20 Maximizing the amount of fluid printed to the layers ensures that fluid is available to act as a vehicle in which the reaction may take place. The fluid is capable of bonding together the particulate material in an amount that is several times the mass of a droplet of the fluid. The amount by which the individual droplets expand or migrate into the particulate material depends on many factors, including the rate at which the fluid
25 and the particulate material react, and may also be affected by the addition of additives to either the particulate material and/or the fluid.

The previous steps of applying a layer of particulate material, applying the fluid, and indexing the movable surface downward are repeated until the final article is completed. Alternatively, those skilled in this art would know how to build an article in
30 layers upward from an immovable platform, by successively depositing, smoothing and printing a series of such layers. FIG. 4 is a schematic representation of a final cylindrical article after it has been completely formed. At the end of the process, only the top surface 34 of a final article 38 is visible in the container. The final article is preferably

completely immersed in a bed 36 of loose particulate material, and is made up of a plurality of essentially evenly distributed layers.

FIG. 5 is a schematic representation of the final cylindrical article 38 after removal of the loose particulate material, preferably by blown air or a vacuum. After
5 removal of the loose particulate material from the final article 38, post-processing treatment may be performed, including cleaning, infiltration with stabilizing materials, painting, etc.

After the final article has been formed, any additional fluid, or free moisture, may be removed to increase the strength of the printed article. Although not required, excess
10 moisture may be removed from the final article by drying at a temperature of at least about 125 °F, generally up to a limit of around 350°F. If an adhesive is incorporated into the article, higher drying temperatures may be used, which is dependent on the adhesive used. In general, when an adhesive is used, the flexural strength of the final article increases with the amount of time it is subject to heat.

After the final article has set, and all loose surrounding powder has been removed, the article may be infiltrated with a variety of materials to improve the hardness, strength, or toughness. These finishes may fill in any pores in the part, improving the surface finish, and making it more impervious to water or solvents. Suitable hardeners include, but are not limited to, molten wax, varnish, lacquer,
15 cyanoacrylate, polyurethane, and epoxy.

A final article formed using the material systems and methods of the present invention will include a plurality of evenly distributed layers of the mixture of the particulate material and the fluid. The layers preferably each have a thickness in the range of less than about 1000 μm , more preferably about 25 μm to about 250 μm , and
25 more preferably still about 80 μm to about 175 μm . For layers having a thickness of less than about 125 μm , the uniformity of the layer typically varies less than about 0.001". The flexural strength of the article of the invention is dependent on, among other things, the composition of both the particulate material and the fluid, the ratio of fluid to particulate material, and the amount of additives, if any. In practice, the strength of the
30 articles is limited only by the minimum strength required in order to handle the article without breaking. The preferred flexural strength of the final articles is dependent on the type of article that is formed, but is typically at least about 1 MPa, more preferably at least about 5MPa, and more preferably at least about 10 MPa. Flexural strength of less

than 1 MPa may be sufficient for some applications.

Example 1

Line tests were performed to determine suitable combinations of anionic starch, cationic starch, and polyelectrolyte. A particulate material was prepared to include a cationic starch and an anionic starch blended in a 1:1 mixture, by weight. A fluid mixture containing an aqueous binder and about 3% of a polyelectrolyte was prepared and dispensed onto the powder. A syringe was used to squirt the polyelectrolyte mixture onto the starch mixture. Suitable material systems are shown below in Table 1.

10

TABLE 1

Cationic Starch	Anionic Starch	Polyelectrolyte	Line Test Results
Apollo 4280	Astro Gum 3010	PMAA	—
		PAA	—
		PSS	++
		PDAC	—
Pencat 600	Astro Gum 3010	PMAA	—
		PAA	—
		PSS	++
		PDAC	—
Apollo 4280	Astro Gum 21	PMAA	+
		PAA	—
		PSS	++
		PDAC	—
Pencat 600	Astro Gum 21	PMAA	+
		PAA	—
		PSS	++
		PDAC	—

Those material system combinations with positive results were further tested on a three-dimensional printing system. Those material systems with negative results were further optimized.

Example 2

Line tests were performed on a material system in which the particulate material

was glass beads having an aminosilane coupling agent on the exterior surface. The fluid material was an aqueous solution containing about 2% potassium sulfate and about 3% of either PMAA or PAA (as shown below in Table 2). The pH of the fluid was adjusted to about 5 by adding a 1 Molar solution of sodium hydrogen sulfate. A syringe was used to squirt the fluid mixture onto the particulate mixture.

The composition of the particulate mixture and fluid mixture are shown below in Table 2 . The resulting lines were cohesive and were lifted out of the bed of glass beads without breaking.

TABLE 2

Glass beads	Bead Diameter (μm)	Polyelectrolyte
Spheriglass, 2530-CP-03	71	PMAA
	71	PAA
Spheriglass, 2227-CP-03	119	PMAA
	119	PAA

Example 3

Test bars were formed to evaluate the strength of a material system. ZB7™ stock binder from Z Corporation was printed onto a particulate mixture. The particulate mixture included polyanionic polystyrene sulfonate (PSS) (MW 70,000, available from Aldrich Chemicals, Milwaukee, Wisconsin) and a polycationic potato starch (available under the product name Unicat C3T from Kalamazoo Paper Chemicals, Kalamazoo, Michigan), and glass beads (available under the product name Spheriglass #2530(CP-03) and #2227(CP-03) from Potter Industries) or technical grade pumice (available from PTI Process Chemicals, Cary, Illinois). The glass beads were unreactive with the PSS, potato starch, and the aqueous fluid.

An electrostatic attraction between the PSS and starch was activated by the fluid, causing the materials to interact chemically to form an essentially solid article that included the glass beads or the pumice.

TABLE 3

PSS	Unicat C3T	Glass Bead Diameter (μm)	Pumice Particle diameter (μm)
5	25	70	
12	6	82	
3	7	90	
9	21	70	
15	35		50
15	35		50
35	15		50

Test bars made of the materials shown above in Table 3 had a strength ranging
5 from 1-2 MPa.

Example 4

This is an example of a two-component materials system in which a reactant in
the liquid combines with a particulate reactant to form an adhesive. The powder used
10 contains 45% maltodextrin, 25% cellulose fiber, 15% sucrose, and 10% Amphomer LV-
71 (National Starch and Chemical, Bridgewater, NJ), in which all powders have a
preferred grain size less than 100 microns, and larger than two microns, most preferably
around 20-40 microns. The Amphomer is the reactive component in the powder. The
binder consists of a mixture of 82% water, 15% 2-amino-2-methyl-1-proanol (AMP
15),and 3% isopropyl alcohol. Amphomer is insoluble in water unless it reacts with AMP.
The combination of AMP and Amphomer dissolves, bonds to the maltodextrin and
cellulose, after which the Amphomer crosslinks with itself. The butylaminomethacrylate
is cationic, and bonds to anionic components in the acrylates portion of the copolymer,
causing the solution to form a gel. This gel stiffens the adhesive bonds with the other
20 components, forming a solid part.

Example 5

This is an example of a two-component materials system in which a first fluid dissolves an adhesive in the powder and a second fluid solidifies the adhesive. The powder of Example 4 is used as well as one of the two binder formulas. Using a machine with at least two independent fluid channels (e.g. the Z402C™ color 3-D printer) A second binder formula consisting of 89% water, 8% acetic acid, and 3% isopropanol is printed through the second set of fluid channels. The binder with AMP is printed in a first pass, and the binder with acetic acid is printed in a second pass. After the first pass, Amphomer dissolves and migrates to bonds between grains of filler. This proceeds until the second pass, when the acid neutralizes the AMP from the first pass, rendering the Amphomer insoluble, and accelerating the solidification.

Example 6

This is an example of a two-component materials system in which a first particulate reactant comprises a salt and the second particulate reactant is a polyelectrolyte. A mixture of a powder is used containing 90% limestone powder and 10% sodium polystyrene sulfonate (Versa TL-70 from Alco Chemical Co.). The grain size of the limestone is preferably less than 50 microns and greater than 2 microns, most preferably around 20 microns. The grain size of the polymer is preferably less than 100 microns, and most preferably between 10 microns and 40 microns. This material is activated with a standard binder solution (ZCorp “ZB7™”) that performs as a solvent for the polymer, dissolving it and bringing it into contact with the limestone. The anionic sulfonate polymer is ionically bonded to the calcium cations in the limestone, resulting in a material with a flexural strength in excess of 14 megapascals (MPa).

Example 7

This is an example of a two-component materials system in which two particulate reactants dissolve in the fluid, one reactant being an adhesive and the other crosslinking the adhesive. In a preferred embodiment following this claim, a powder consisting of a mixture of 22% sucrose, 25% cellulose fiber, 52% maltodextrin, 1% polyethylene oxide (molecular weight 5,000,000) and 2% polyvinyl alcohol(PVA), was built using a standard fluid binder (ZCorp ZB7™) and found to have approximately 20% higher flexural strength than the equivalent mixture with maltodextrin replacing the PVA.

1. A method of three-dimensional printing, comprising:
providing a first layer of dry particulate material comprising an ionic reactant;
5 dispensing a homogeneous fluid onto a first region of the first layer, the fluid
comprising an ionic reactant; and
allowing an ion exchange reaction to occur between the particulate reactant and
the reactant in the fluid, the reaction causing a solidified material to form in the first
region.
- 10 2. The method of claim 1, wherein the reactant in the fluid is an electrolyte.
3. The method of claim 2, wherein the electrolyte is a polyelectrolyte.
- 15 4. The method of claim 3, wherein the polyelectrolyte is a cationic polyelectrolyte.
5. The method of claim 4, wherein the cationic polyelectrolyte is selected from the
group consisting of polyallylamine hydrochloride, polybutylaminoethyl methacrylate,
polyethyleneimine, polyvinyl pyridine and poly diallyldimethylammonium chloride.
- 20 6. The method of claim 3, wherein the polyelectrolyte is an anionic polyelectrolyte.
7. The method of claim 6, wherein the anionic polyelectrolyte is selected from the
group consisting of sulfonated polystyrene, polyacrylic acid, polymethacrylic acid,
25 polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of
polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of
polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of
polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium
styrene sulfonate with maleic anhydride.
- 30 8. The method of claim 6, wherein the particulate ionic reactant is a cationic
reactant.

5 glass beads.

reactant.

15

20

25

comprise an inert particle having a reactive coating.

30

16

inert particle.

17. The method of claim 12, wherein the reactive coating is selected from the group consisting of phenolic precursors, vinyl groups, acids, bases, isocyanates, cyanoacrylates, epoxides, amines, carboxylic acids, hydroxyl groups, acetates, amides and esters.

18. The method of claim 12, wherein the particulate material further comprises a reactant that is soluble in the fluid.

19. The method of claim 13, wherein the reaction is an ion exchange reaction.

20. The method of claim 13, wherein the reaction is a hydrogen-bonding reaction.

21. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material comprising a reactant selected from the group consisting of metals, minerals and ceramic oxides;
dispensing a homogeneous fluid onto a first region of the first layer, the fluid comprising a reactant; and
allowing a reaction to occur between the particulate reactant and the reactant in the fluid, the reaction causing a solidified material to form in the first region.

22. The method of claim 21, wherein the reactant in the fluid is a polymer capable of solidification.

23. The method of claim 22, wherein the solidification occurs by ionic bonding.

24. The method of claim 22, wherein the solidification occurs by hydrogen bonding.

25. The method of claim 22, wherein the solidification occurs by cross-linking.

26. The method of claim 22, wherein the reactant is selected from the group consisting of sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic

acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium styrene sulfonate with maleic anhydride.

5

27. The method of claim 22, wherein the metal is selected from the group consisting of iron, copper, carbon steel, stainless steel, aluminum, brass, molybdenum, tungsten, magnesium, and cobalt.

10 28. The method of claim 26, wherein the ceramic oxide is selected from the group consisting of alumina (Al_2O_3), anatase (TiO_2), silicon dioxide, aluminum silicate and glass.

29. The method of claim 26, wherein the mineral is limestone (CaCO_3), magnetite,
15 calcium silicate (CaSiO_4), hydrous calcium sulfate ($\text{CaSO}_4 \cdot 2\text{H}_2\text{O}$), hydrated lime ($\text{Ca}(\text{OH})_2$) and calcium phosphate.

30. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material comprising a particles having a
20 reactive surface;
dispensing a fluid onto a first region of the first layer, the fluid comprising a reactant; and
allowing a reaction to occur between the reactive polymer and the reactant in the fluid, the reaction causing a solidified material to form in the first region.

25

31. The method of claim 30, wherein the reactant in the fluid is a monomer and the particulate material further comprises an initiator.

32. The method of claim 31, wherein the monomer is selected from the group
30 consisting of a vinylic monomer, an acrylic monomer and a dienic monomer.

33. The method of claim 32, wherein the monomer is selected from the group consisting of acrylic acid, methacrylic acid, acrylamide and styrene.

34. The method of claim 31, wherein the reactive polymer is selected from the group consisting of an unsaturated polyester, polybutadiene, polyisoprene, an unsaturated polyurethane and copolymers thereof.

5

35. The method of claim 31, wherein the initiator is selected from the group consisting of potassium persulfate, ammonium persulfate, sulfuric acid, perchloric acid, fluorosulfonic acid, trifluoromethylsulfonic acid, trifluoroacetic acid, tin tetrachloride, aluminum trichloride, and boron trifluoride, potassium peroxodisulfate, ammonium persulfate with N,N,N',N'-tetramethylethylenediamine (TMEDA), 3-dimethylaminopropionitrile (DMAPN, potassium persulfate with 4,4-azobis(4-cyanovaleric acid), dibenzoyl peroxide, t-butyl perbenzoate and azobisisobutyronitrile.

10

36. The method of claim 30, wherein the particulate material comprising a reactive polymer includes inert particles having a reactive coating.

15

37. The method of claim 30, wherein the reactive coating is a polyol group.

38. The method of claim 37, wherein the reactant in the fluid is an isocyanate.

20

39. The method of claim 38, wherein the isocyanate is Bayhydur XP-7063.

40. The method of claim 36, wherein the reactive coating comprises sodium polystyrene sulfonate, sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium styrene sulfonate with maleic anhydride.

25

30

41. The method of claim 40, wherein the reactant in the fluid is a cationic polyelectrolyte.

42. The method of claim 41, wherein the cationic polyelectrolyte is selected from the group consisting of polyallylamine hydrochloride, polybutylaminoethyl methacrylate, polyethyleneimine, polyvinyl pyridine and poly diallyldimethylammonium chloride.
- 5 43. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material comprising a reactant; and
dispensing a fluid onto a first region of the first layer, the fluid comprising a
reactant capable of hydrogen-bonding with the particulate reactant.
- 10 44. The method of claim 43, further comprising the step of allowing hydrogen
bonding to occur between the particulate reactant and the reactant in the fluid, the
hydrogen bonding causing a solidified material to form in the first region.
45. The method of claim 44, wherein the particulate reactant is soluble in the fluid.
- 15 46. The method of claim 45, wherein the particulate reactant is a hydrogen-bond
donor.
47. The method of claim 46, wherein the hydrogen-bond donor is selected from the
20 group consisting of polymethacrylic acid, polyacrylic acid and polyvinyl alcohol.
48. The method of claim 46, wherein the reactant in the fluid is a hydrogen-bond
acceptor.
- 25 49. The method of claim 48, wherein the hydrogen-bond acceptor is selected from
the group consisting of polyethylene oxide, polyvinyl pyridine, polyethylene glycol and
polyvinylpyrrolidone.
50. The method of claim 45, wherein the particulate reactant is a hydrogen-bond
30 acceptor.
51. The method of claim 50, wherein the hydrogen-bond acceptor is selected from
the group consisting of polyethylene oxide, polyvinyl pyridine, polyethylene glycol and

52. The method of claim 50, wherein the reactant in the fluid is a hydrogen-bond donor.

53. The method of claim 52, wherein the hydrogen-bond donor is selected from the group consisting of polymethacrylic acid, polyacrylic acid and polyvinyl alcohol.

10

15

20

25

58. The method of claim 57, wherein the hydroxide is selected from the group consisting of sodium hydroxide, potassium hydroxide, and ammonium hydroxide.

30

60. The method of claim 59, wherein the reactant in the fluid is formaldehyde.

61. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material; and
5 dispensing a first fluid comprising an adhesive and a second fluid comprising a
cross-linking agent onto a first region of the first layer; and
allowing a cross-linking reaction to occur, the reaction causing a solidified
material to form in the first region.
- 10 62. The method of claim 61, wherein the adhesive is polyvinyl alcohol and the cross-
linking agent is Borax.
63. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material; and
15 dispensing a first fluid comprising a hydrogen-bond donor and a second fluid
comprising a hydrogen-bond acceptor onto a first region of the first layer.
64. The method of claim 63, further comprising the step of allowing hydrogen
bonding to occur between the hydrogen-bond donor and acceptor, the hydrogen bonding
20 causing a solidified material to form in the first region.
65. The method of claim 64, wherein the hydrogen-bond donor is selected from the
group consisting of polymethacrylic acid, polyacrylic acid and polyvinyl alcohol.
- 25 66. The method of claim 64, wherein the hydrogen-bond acceptor is selected from
the group consisting of polyethylene oxide, polyvinyl pyridine, polyethylene glycol and
polyvinylpyrrolidone.
67. A method of three-dimensional printing, comprising:
30 providing a first layer of a dry particulate material;
dispensing a first fluid comprising a first reactant and a second fluid comprising a
second reactant onto a first region of the first layer; and
allowing a reaction to occur between the first and second reactants to form an

adhesive.

68. The method of claim 67, wherein the formation of the adhesive causes a solidified material to form in the first region.

5

69. The method of claim 68, wherein the first reactant is an isocyanate.

70. The method of claim 69, wherein the isocyanate is Bayhydur XP-7063.

10 71. The method of claim 69, wherein the second reactant is a polyol.

72. The method of claim 71, wherein the polyol is selected from the group consisting of glycerol, sorbitol, erythritol and epoxy-functionalized glass beads.

15 73. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material comprising an adhesive;
dispensing a first fluid onto the first layer to dissolve the adhesive;
dispensing a fluid solidifying agent onto a first region of the first layer; and
allowing a reaction to occur between the first fluid and the solidifying agent, the
20 reaction causing a solidified material to form in the first region.

74. The method of claim 73, wherein the particulate adhesive is octacrylamide/acrylates/butylaminoethylmethacrylate copolymer.

25 75. The method of claim 74, wherein the first fluid is selected from the group consisting of 2-amino-2-methyl 1-propanol (AMP), 2-amino-2-methyl 1-3 propanediol (AMPD), 2-amino-2-ethyl 1-3-propanediol (AEPD), sodium hydroxide, potassium hydroxide, and ammonium hydroxide.

30 76. The method of claim 75, wherein the solidifying agent is an acid.

77. The method of claim 76, wherein the acid is selected from the group consisting of hydrochloric acid, citric acid, succinic acid, adipic acid, polyacrylic acid,

polymethacrylic acid, and polyvinyl sulfonic acid.

78. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material;
5 dispensing a fluid monomer onto the first layer;
dispensing a fluid comprising an initiator onto a first region of the first layer; and
allowing polymerization to occur, the polymerization causing a solidified
material to form in the first region.
- 10 79. The method of claim 78, wherein the initiator is cationic.
80. The method of claim 79, wherein the cationic initiator is selected from the group
consisting of sulfuric acid, perchloric acid, fluorosulfonic acid, trifluoromethylsulfonic
acid, trifluoroacetic acid, tin tetrachloride, aluminum trichloride, and boron trifluoride.
- 15 81. The method of claim 79, wherein the monomer is selected from the group
consisting of isobutene, alkenes, alkyl-vinyl ethers, vinylacetals, dienes, styrene, N-vinyl
carbazole, beta-pinene, oxiranes, N-substituted aziridines, lactams and oxazolines.
- 20 82. The method of claim 78, wherein the initiator is a free-radical initiator.
83. The method of claim 82, wherein the free-radical initiator is selected from the
group consisting of potassium peroxodisulfate, ammonium persulfate with N,N,N',N'-
tetramethylethylenediamine (TMEDA) or 3-dimethylaminopropionitrile (DMAPN,
25 potassium persulfate with 4,4-azobis(4-cyanovaleric acid), dibenzoyl peroxide, t-butyl
perbenzoate and azobisisobutyronitrile.
84. The method of claim 82, wherein the monomer is selected from the group
consisting of vinylic monomers, acrylic monomers, dienic monomers, acrylic acid,
30 methacrylic acid and acrylamide.
85. A method of three-dimensional printing, comprising:
providing a first layer of a dry particulate material comprising a first reactant and

a second reactant;

dispensing a fluid onto a region of the first layer; and

allowing a reaction between the first and second reactants to occur, the reaction causing a solidified material to form in the first region.

5

86. The method of claim 85, wherein at least one of the first and second reactants is soluble in the fluid.

87. The method of claim 86, wherein the first and second reactants are ionic
10 reactants.

88. The method of claim 87, wherein the first reactant is an electrolyte.

89. The method of claim 88, wherein the first reactant is a polyelectrolyte.
15

90. The method of claim 89, wherein the first reactant is a cationic polyelectrolyte.

91. The method of claim 90, wherein the cationic polyelectrolyte is selected from the group consisting of polyallylamine hydrochloride, polybutylaminoethyl methacrylate,
20 polyethyleneimine, polyvinyl pyridine and poly diallyldimethylammonium chloride.

92. The method of claim 89, wherein the first reactant is an anionic polyelectrolyte.

93. The method of claim 92, wherein the anionic polyelectrolyte is selected from the
25 group consisting of sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid, copolymer of sodium styrene
30 sulfonate with maleic anhydride, polyethylene oxide, polyvinyl pyridine, polyethylene glycol and polyvinylpyrrolidone.

94. The method of claim 92, wherein the second reactant is a cationic reactant.

95. The method of claim 94, wherein the cationic reactant is selected from the group consisting of Empresol N, Unicat KC1420, Unicat C3T, PENCAT 600, APOLLO 4280, polyallylamine hydrochloride, polybutylaminoethyl methacrylate, polyethyleneimine, polyvinyl pyridine, poly diallyldimethylammonium chloride, aminosilane-functionalized glass beads.
96. The method of claim 90, wherein the second reactant is an anionic reactant.
97. The method of claim 96, wherein the anionic reactant is selected from the group consisting of Astro-gum 3010, Astro-gum 21, sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium styrene sulfonate with maleic anhydride.
98. The method of claim 87, wherein the reaction is an ion exchange reaction.
99. The method of claim 85, wherein the first reactant is selected from the group consisting of metals, salts and ceramic oxides.
100. The method of claim 99, wherein the fluid is an acid.
101. The method of claim 100, wherein the acid is selected from the group consisting of acetic acid and hydrochloric acid.
102. The method of claim 100, wherein the second reactant is selected from the group consisting of a polymeric acid, sulfonated polystyrene, polyacrylic acid, polymethacrylic acid, polyvinyl sulfonic acid, alkali metal salts of polyacrylic acid, alkali metal salts of polymethacrylic acid, alkali metal salts of polyvinyl sulfonic acid, ammonium salt of polyvinyl sulfonic acid, ammonium salt of sulfonated polystyrene, ammonium salt of polyacrylic acid, ammonium salt of polymethacrylic acid and copolymer of sodium

103. The method of claim 102, wherein the metal is selected from the group consisting of iron, copper, carbon steel, stainless steel, aluminum, brass, molybdenum, tungsten, magnesium, and cobalt.

10

15 106. The method of any one of claims 1, 12, 21, 30, 43, 55, 61, 63, 67, 73, 78 and 85,
wherein the reaction occurs in the absence of an applied stimulus.

20

25

30 110. The method of claim 109, further comprising the step of dispensing the fluid onto a first region of the second layer.

111. The method of claim 109, further comprising the steps of providing subsequent

layers of the particulate material over a preceding layer, each providing step followed by the dispensing step.

112. The method of any one of claims 1, 12, 21, 30, 43, 55, 61, 63, 67, 73, 78 and 85,
5 wherein the particulate material comprises a mixture of inert particles and the particulate reactant.

113. The method of any one of claims 1, 12, 21, 30, 43, 55, 61, 63, 67, 73, 78 and 85,
wherein the particulate material consists essentially of the particulate reactant.

10

114. The method of any one of claims 1, 12, 21, 30, 43, 55, 61, 63, 67, 73, 78 and 85,
wherein the inert particle is selected from the group consisting of granular, powdered or fibrous materials.

15 115. The method of any one of claims 1, 12, 21, 30, 43, 55, 61, 63, 67, 73, 78 and 85,
wherein the inert particle is selected from the group consisting of a polymer, a ceramic, a metal, an organic material, an inorganic material, a mineral, clay and a salt.

116. The method of claim 115, wherein the polymer is selected from the group
20 consisting of poly(methyl methacrylate), polystyrene, polyamide, polyester, a latex, polyethylene, polypropylene, polyurethane, polyvinyl chloride, polyvinyl acetate, cross-linked polyvinyl pyrrolidone, hydrophilic polyurethane, poly(ethylene terephthalate), thermoplastic urethane, styrene-acrylonitrile copolymer, thermoplastic polyolefin, an epoxy-based polymer, polyether, polyamine, a polyacid, a polycarbonate, a vinyl
25 polymer, an aromatic polyamide, a diene polymer, poly(phenylene oxide), polysiloxane, polynorbornene, polyisoprene, a polyphenylene ether, styrene-butadiene block copolymer, acrylonitrile-butadiene-styrene, high impact polystyrene and copolymers thereof.

30 117. The method of claim 115, wherein the ceramic is selected from the group consisting of gypsum, limestone, clay, aluminum oxide, aluminum silicate, calcium silicate, silicon dioxide, titanium dioxide, glass, iron oxide, zinc oxide, magnetite, aluminum hydroxide, magnesium oxide, calcium phosphate, zirconium silicate, silicon

118. The method of claim 115, wherein the organic material is selected from the group consisting of starch, cellulose, wood powder, wax, resin, bone, protein, carbohydrates, sugars, textile fibers and dietary fibers.

119. The method of claim 115, wherein the salt is selected from the group of sodium silicate, sodium carbonate, sodium bicarbonate, sodium borate, sodium chloride, sodium sulfate, potassium sulfate, potassium chloride, magnesium sulfate, magnesium chloride, potassium aluminum sulfate, sodium polyphosphate and sodium acetate, hydrous calcium sulfate, calcium phosphate, sodium silicate, and hydrated lime ($\text{Ca}(\text{OH})_2$).

ABSTRACT

The present invention is directed to three-dimensional printing material systems and method, and an article made therefrom. The method of the present invention includes building cross-sectional portions of a three-dimensional article, and assembling the individual cross-sectional areas in a layer-wise fashion to form a final article. The individual cross-sectional areas are built by using an ink-jet printhead to deliver a fluid to a particulate material that includes particulate material.

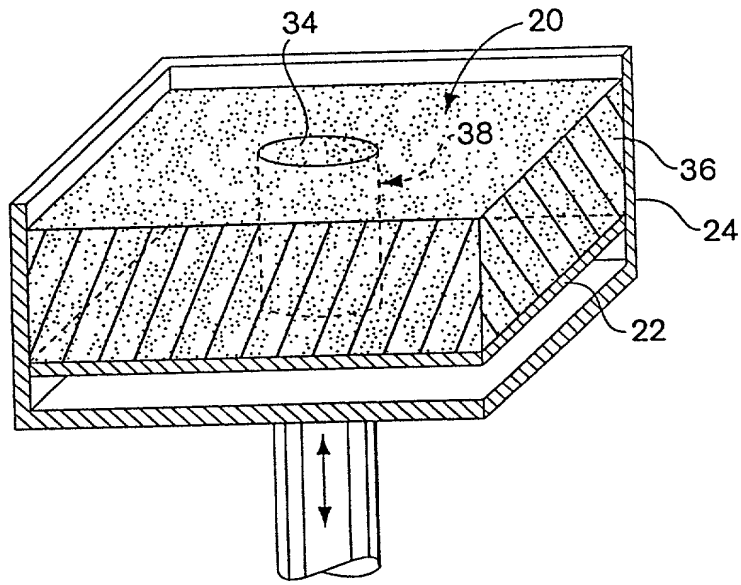


Fig. 4




Fig. 5